



S270V SKID STEER LOADER

QUICK SPECS

Rated Operating Capacity	2700 lbs (1225 kg)
Net Power	70.7 hp (52.7) @ 2500rpm
Operating Weight - approx.	8100 lbs (3674 kg)
Lift Height	130.3 in (3310 mm)

POWERFUL 70.7-HP INTERIM TIER 4 NATURALLY ASPIRATED DIESEL ENGINE

SUSPENSION SEAT FOR ALL-DAY COMFORT

SPACIOUS PANORAMIC-VIEW CABS

SELF-LEVELING SYSTEM AND HYDRAGLIDE™ RIDE CONTROL STANDARD

CHOOSE FROM 2 QUICK-ATTACH MOUNTING SYSTEMS

CORROSION-REISTANT CYLINDER RODS

BEST-IN-CLASS HEIGHT-TO-BUCKET HINGE PIN

LEVEL II ROPS/FOPS OVERHEAD GUARD STANDARD

HIGH-FLOW HYDRAULICS

Some guys see a tough job and back off. Don't be one of them.

Start every day knowing that no matter what it brings, you can handle it. With a towering lift height of 130.3 in., the Yanmar S270V Skid Steer can load 2,700 lbs. into just about anything. And when you're not lifting heavy loads really high, the S270V puts more attachments to use than you have jobs to do.

INNOVATIVE FEATURES



70.7-HP YANMAR DIESEL ENGINE

You can't sacrifice the power to lift heavy pallets or haul massive bucket loads for the sake of efficiency. With Yanmar's Interim Tier 4 naturally aspirated diesel engine, you don't have to. You get the power to lift up to a ton and a half and the fuel economy to lift your operating margins.




SPACIOUS, COMFORTABLE CAB

With Yanmar's roomy and ergonomically comfortable cabs, you can put in a long day without feeling that way. You won't have to constantly jerk your head around to see where you're going or what you're doing, either. Windshields are wide and side screens are large for maximized visibility, improving both efficiency and safety.



CHANGE ATTACHMENTS WITH JUST A FINGER

Time spent changing attachments means less time you have to actually get work done. With our optional electronic attachment system, you can go from loading buckets of gravel to moving pallets of stone with virtually the push of a button.

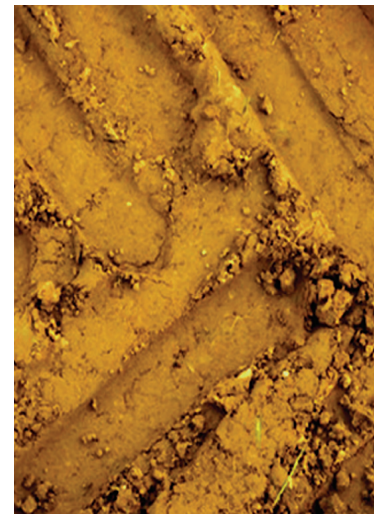

ENGINE	Make	Yanmar
	Model	4TNV98T - ZNMS
	Net Power	70.7 hp (52.7 kW)
	Rated Engine Speed	2500 rpm
	Displacement	203 cu.in. (3.3 L)
CAPACITIES/ WEIGHT	Rated Operating Capacity	2700 lbs (1225 kg)
	Tipping Load	5400 lbs (2449 kg)
	Fuel Tank	20 gal (76 L)
	Travel Speed - Max. with 2-speed option	11.9 mph (19.2 km/hr)
	Operating Weight - Approximate	8100 lbs. (3674 kg)
DIMENSIONS	Overall Operating Height - Fully Raised	169.8" (4313 mm)
	Height to Hinge Pin - Fully Raised	130.3" (3310 mm)
	Overall Height to top of ROPS	80.5" (2045 mm)
	Ground Clearance to Chassis	8" (203 mm)
	Overall Length w/ Bucket	149.2" (3790 mm)
	Overall Length w/o Bucket	115" (2921 mm)
	Wheelbase	49.8" (1265 mm)
	Dump Reach at Full Height	34" (864 mm)
	Rollback at Ground Level	28°
	Dump Angle	41°
	Overall Width	69.5" (1765 mm)
	Bucket Width	70" (1778 mm)
	Clearance Radius - Rear	65.5" (1664 mm)
	Clearance Radius - Front w/o Bucket	56.3" (1430 mm)
	Clearance Radius - Front w/ Bucket	93" (2362 mm)
	Seat to Ground Height	40.2" (1021 mm)
	Rollback at Full Height	94°
	Dump Height	99" (2515 mm)
Departure Angle	27°	
Standard Tire Size	12.00 x 16.5 HD	
HYDRAULICS	Auxiliary Hydraulics - Standard	21.8 gpm (82.5 L/min)
	High-Flow Hydraulics - Optional	36.3 gpm (137 L/min)
	System Relief Pressure (bar)	3300 psi (228)
	Reservoir Capacity	10.5 gal. (40 L)
ELECTRICAL	Battery	12-volt (950 CCA)
	Starter	12-volt (3.0 kW)
	Alternator	90-amp